PROLONGEMENT du chemin GREENBANK Road EXTENSION - P H A S E 1

BOARD / PANNEAU 7
av. RIVER RUN Ave.

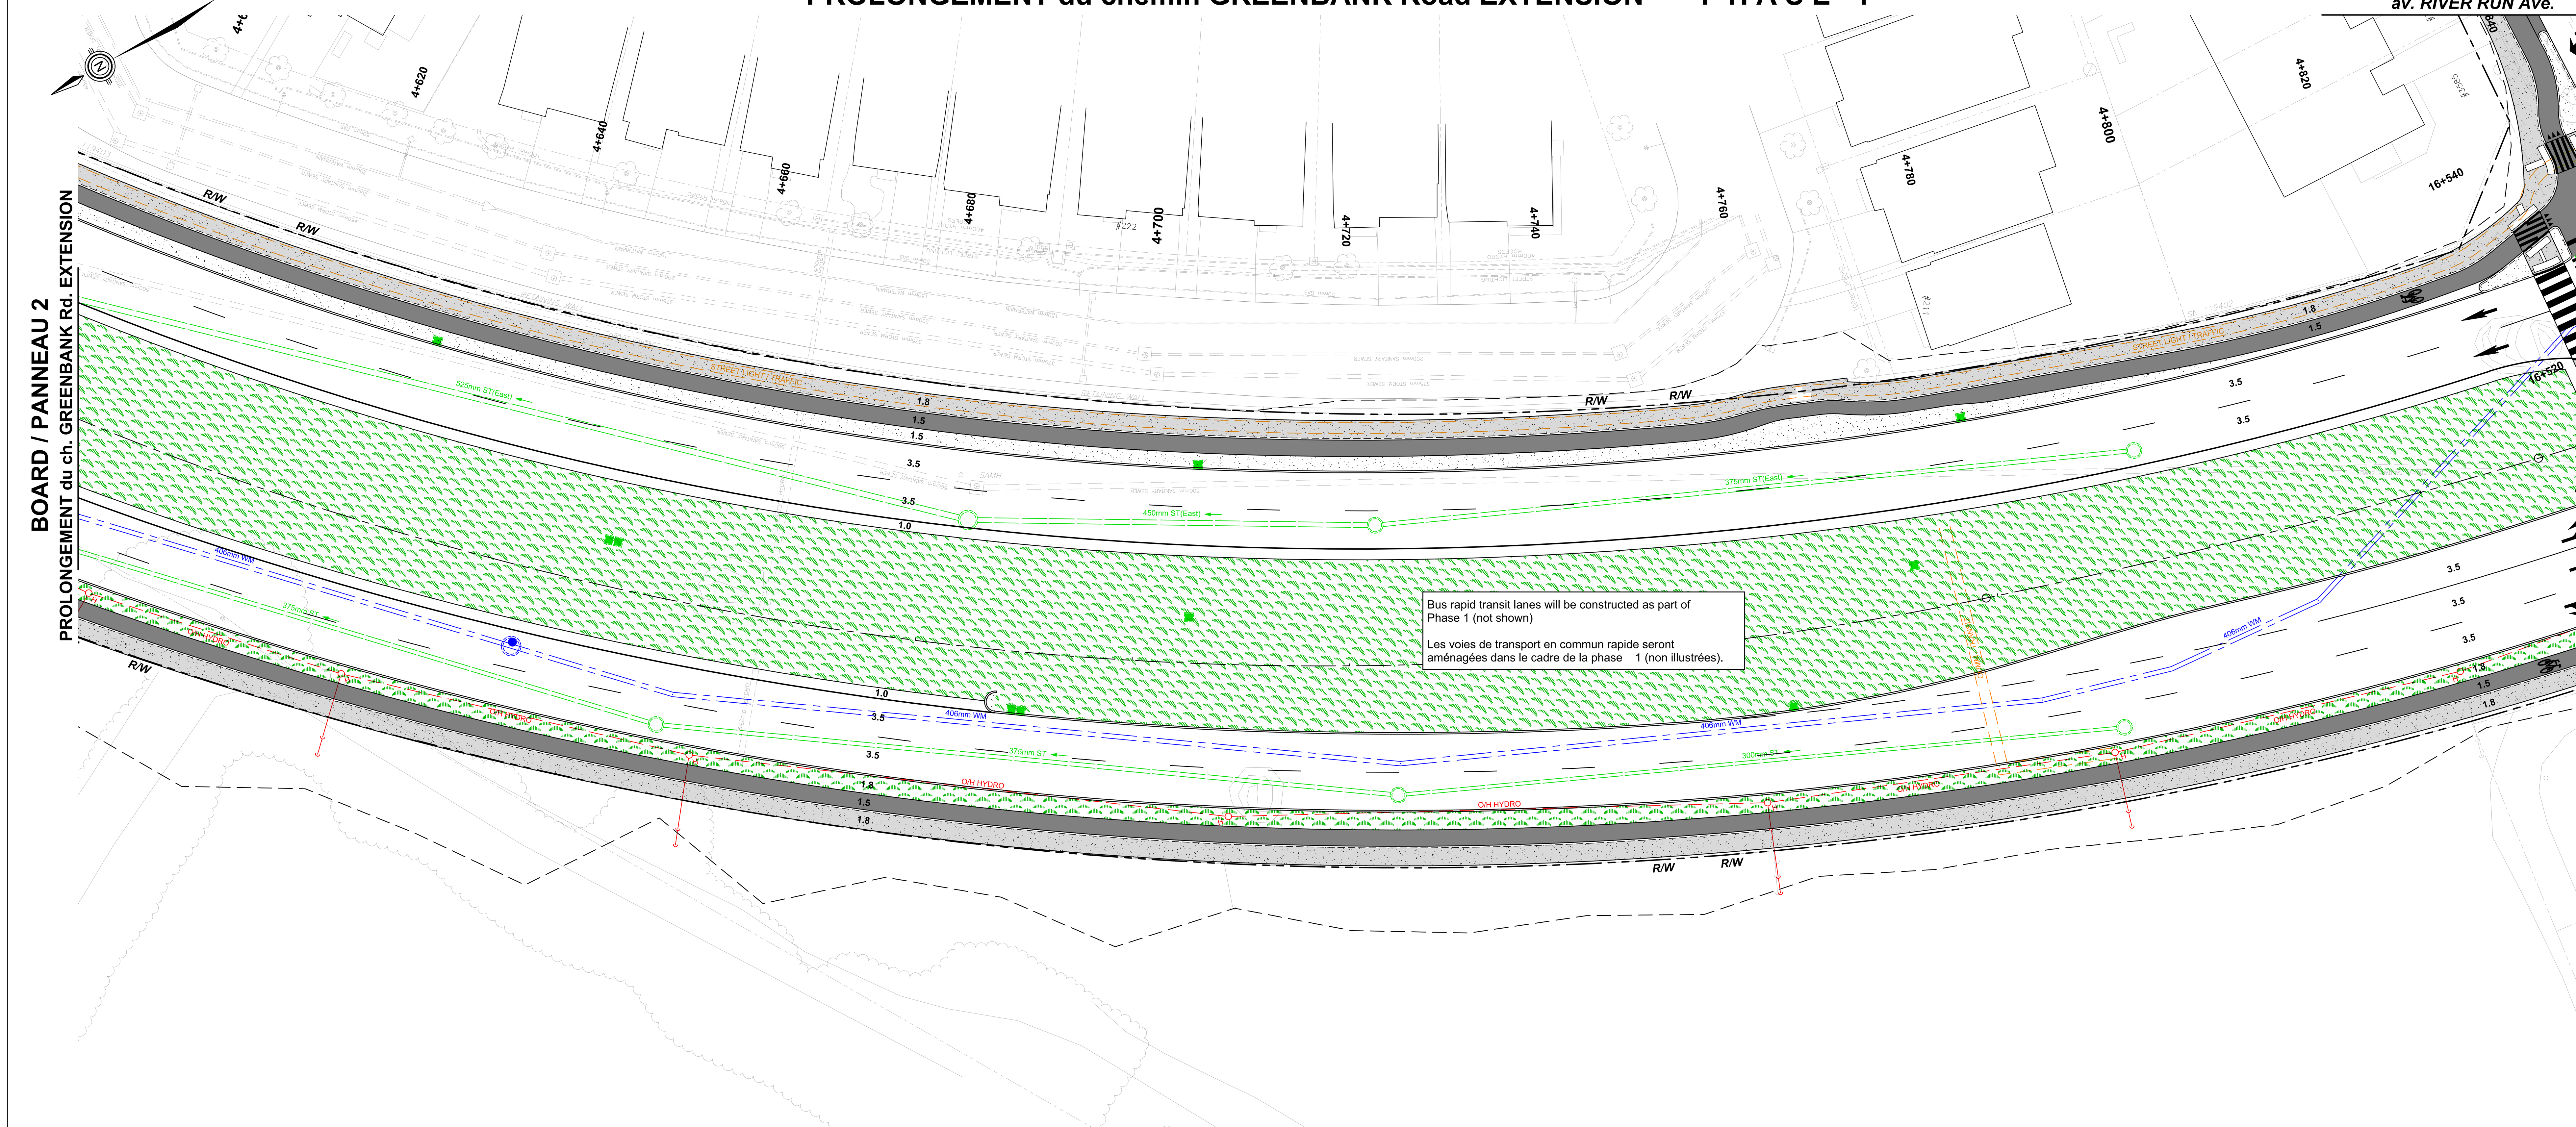

Scale / Échelle
Horizontal 1:250 — 7.5m 3.75 0 2.5 5 10m
Vertical 1:50 — 1.5m 0.75 0 0.5 1 2m

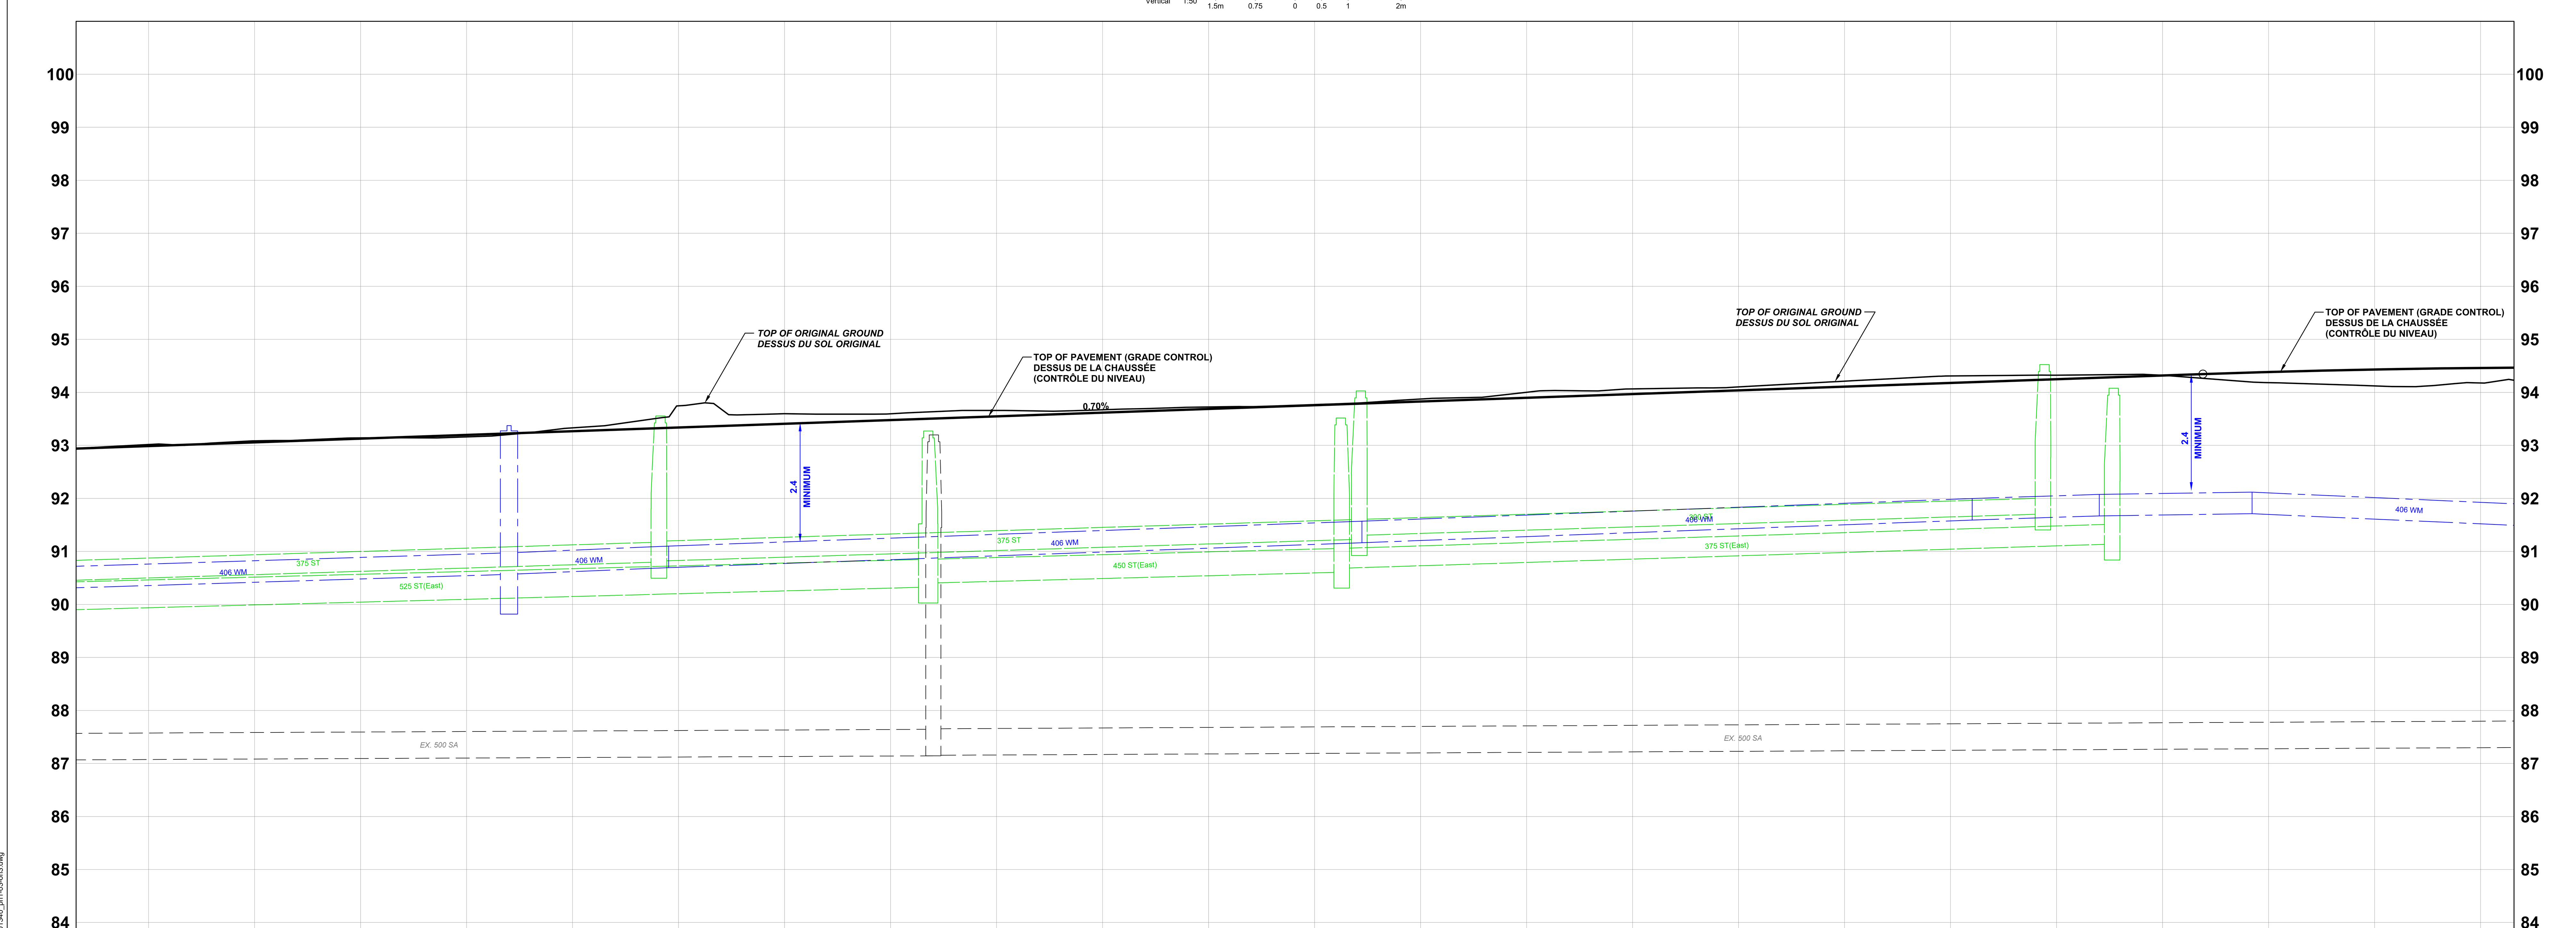

STATION	C/L PROFILE / PROFIL C/L	
4+610	92.987	93.016
4+620	93.057	93.085
4+630	93.127	93.141
4+640	93.197	93.159
4+650	93.267	93.330
4+660	93.337	93.746
4+670	93.407	93.596
4+680	93.477	93.596
4+690	93.547	93.658
4+700	93.617	93.671
4+710	93.687	93.724
4+720	93.757	93.769
4+730	93.827	93.874
4+740	93.897	94.001
4+750	93.967	94.064
4+760	94.037	94.102
4+770	94.107	94.211
4+780	94.177	94.309
4+790	94.247	94.324
4+800	94.317	94.322
4+810	94.383	94.183
4+820	94.432	94.122
4+830	94.460	94.177

GREENBANK ROAD AND SOUTH WEST TRANSITWAY EXTENSION PHASE 1

RIVERBOAT HEIGHTS to CAMBRIAN ROAD

DETAILED DESIGN

BOARD 3

CHEMIN GREENBANK ET PROLONGEMENT DU TRANSITWAY SUD-OUEST PHASE 1

RIVERBOAT HEIGHTS au CHEMIN CAMBRIAN

CONCEPTION DÉTAILLÉE

PANNEAU 3

- An interim Realigned Greenbank Road cross-section from Riverboat Heights to River Run Avenue / Perseus Avenue will include four traffic lanes, cycle tracks and sidewalks;
- A protected intersection is planned at Riverboat Heights consistent with the ultimate road design;
- The Bus Rapid Transit Lanes will be constructed as part of Phase 1 instead of the grass medians shown ;
- Coordination with ongoing development is required for intersections, municipal servicing and grading;
- Storm sewers will collect corridor drainage and outlet to existing storm sewers;
- Coordination/protection/relocation of utilities will be required.

- Un tronçon transversal intérimaire du nouveau tracé du chemin Greenbank à partir de Riverboat Heights jusqu'à l'avenue River Run/avenue Perseus comprend quatre voies de circulation, des pistes cyclables et des trottoirs;
- Une intersection protégée est prévue à Riverboat Heights qui correspond à la configuration ultime de la voirie;
- Les voies de transport en commun rapide seront aménagées dans le cadre de la phase 1 plutôt qu'aux endroits prévus pour les terre-pleins gazonnés.
- De la coordination avec les aménagements en cours est nécessaire pour les intersections, la viabilisation municipale et le nivellement;
- Des égouts pluviaux recueilleront le drainage du couloir et se déverseront dans les égouts pluviaux existants;
- La coordination, la protection et le déplacement des services publics seront requis.

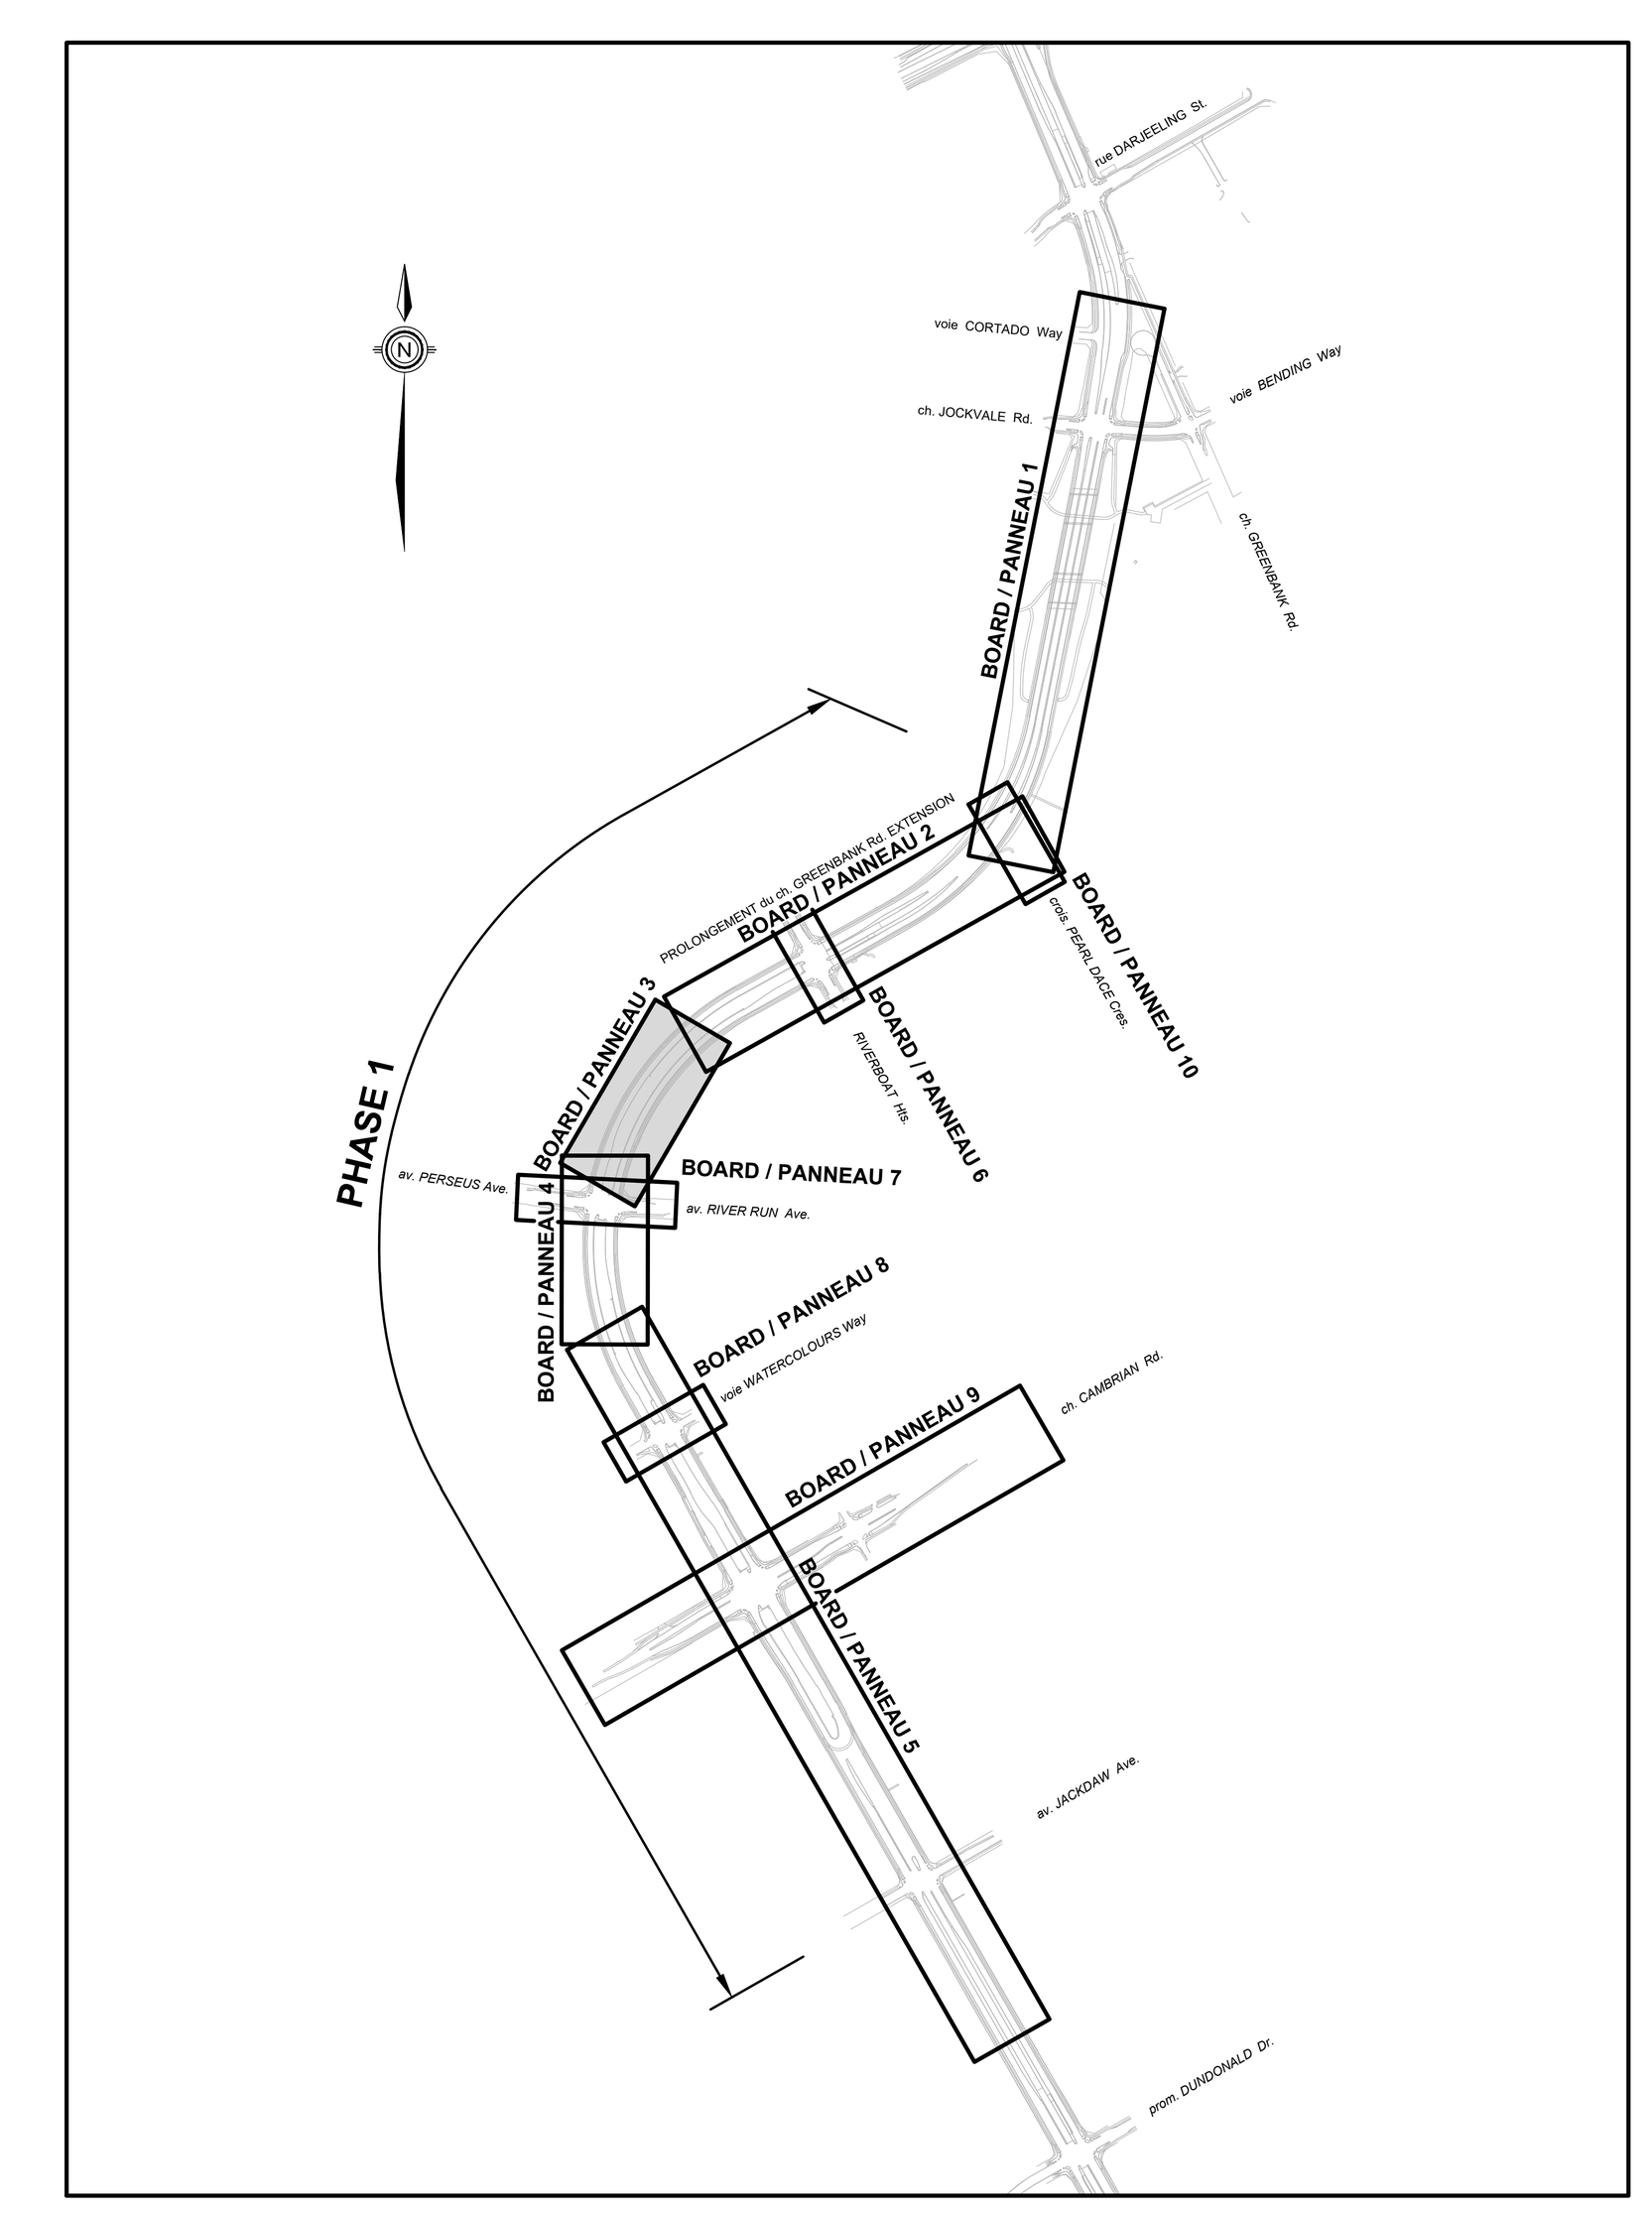

LEGEND:
LÉGENDE:

- ROAD RIGHT-OF-WAY / EMPRISE ROUTIÈRE
- SIDEWALK / TROTTOIR
- BOULEVARD / MEDIAN / BOULEVARD / MÉDIANE
- CYCLE TRACK / PISTE CYCLABLE
- SOD / GAZON
- 200mm SA — PROPOSED SANITARY SEWER / ÉGOUT SANITAIRE PROPOSÉ
- 525mm ST — PROPOSED STORM SEWER / ÉGOUT PLUVIAL PROPOSÉ
- 610mm WM — PROPOSED WATERMAIN / CONDUITE D'EAU PRINCIPALE PROPOSÉE

Stantec