


Integrated Renewal: Drouin Avenue

Contract No. CP000665



Public information session
March 21, 2024: 7 to 9 pm

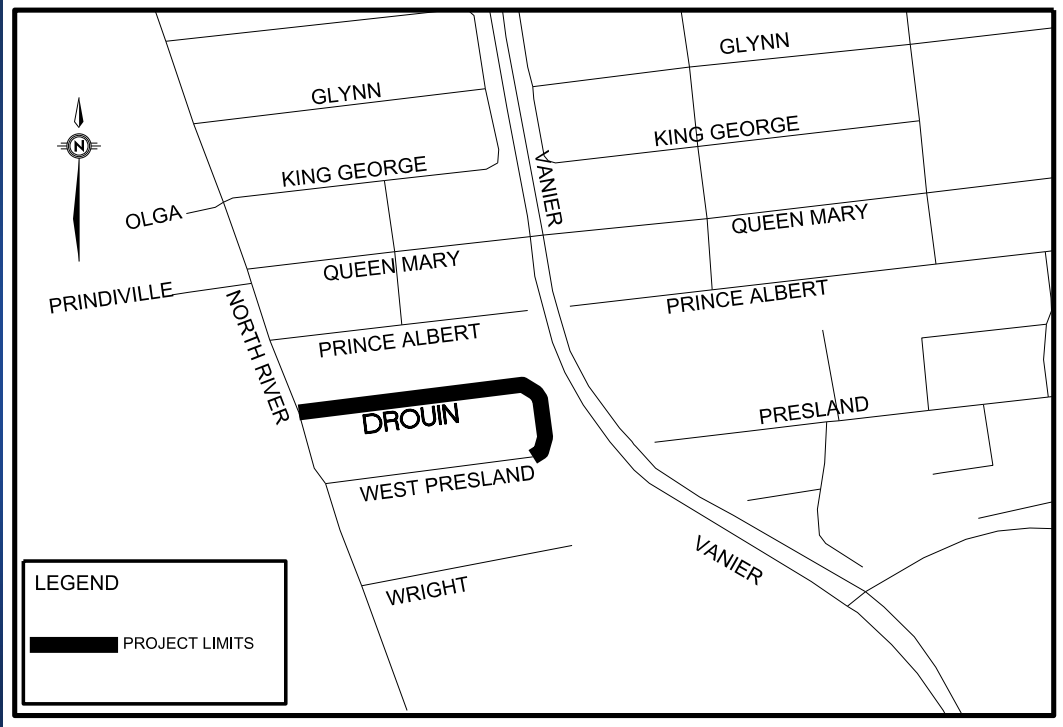

Land acknowledgement

We recognize that Ottawa is located on unceded territory of the Anishinabe Algonquin Nation.

We extend our respect to all First Nations, Inuit and Métis peoples for their valuable past and present contributions to this land.

We also recognize and respect the cultural diversity that First Nations, Inuit and Métis people bring to the City of Ottawa.

Introductions

Thank you for attending this public information session.

Information boards are set up around the room. Please take your time to review if you have any questions, we are more than happy to assist. Alternatively, the presentation can be accessed by scanning the QR Code.

Hosts

City of Ottawa | Owner


- Joe Mojsej, City Project Manager

Ainley Group | Design Consultant

- Guy Ste-Croix, Project Manager
- Anmar Al-Faraj, Project Engineer



Project timeline

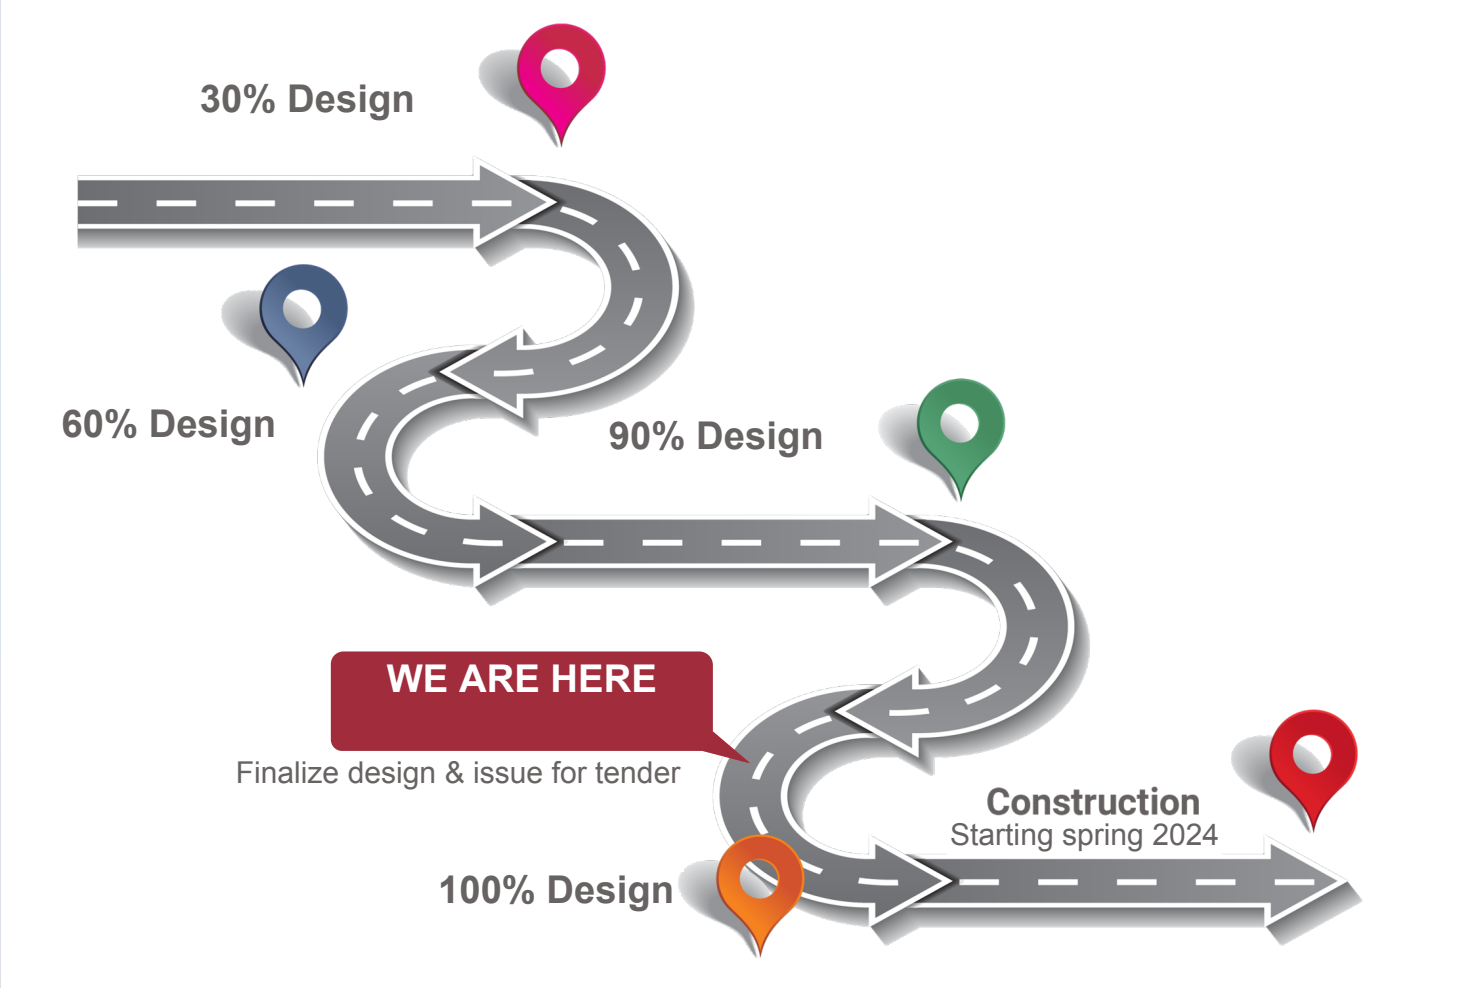

Project scope

Water distribution works

- Replace existing 150mm diameter unlined cast iron watermain with new 200mm diameter PVC watermain.
- Install new fire hydrants to meet fire hydrant spacing requirements.
- Replace existing services up to the property line.
- Install temporary water service during construction to facilitate the installation of the new watermain.



Project scope

Sanitary drainage works

- Replace existing 225mm diameter sanitary system with new 250mm diameter PVC sanitary sewers and maintenance holes.
- Install new PVC sanitary services up to the property line.



Project scope

Storm drainage works

- Existing 1800mm diameter concrete storm trunk sewer to remain protected in place.
- Install new and replace existing catch basins to improve collection and drainage of surface water.
- Install new 300mm diameter storm sewer system and maintenance holes along the north-south leg of Drouin Avenue to eliminate existing surface ponding and drainage issues on Drouin Avenue/West Presland Road intersection (see photo).



Project scope

Road reconstruction works


- Replace existing concrete sidewalks and concrete barrier curb.
- Replace the existing road structure with new granular road base and two (2) lifts of asphalt.
- Reinststate existing driveway aprons.




Project scope

Road geometry improvement and traffic calming measures


- Install tactile plates at sidewalk to curb ramps for AODA (Accessibility for Ontarians with Disabilities Act) compliance.
- Install asphalt raised crosswalk and narrow Drouin Avenue/North River Road intersection to reduce vehicle turning speeds as well as pedestrian crossing distances.
- Install four (4) speed humps equally spaced along Drouin Avenue to self-enforce motorist to reduce vehicle speed on local residential roads.

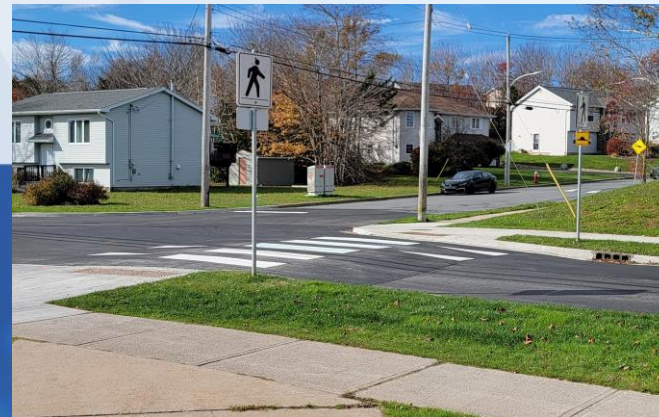


Servicing plan

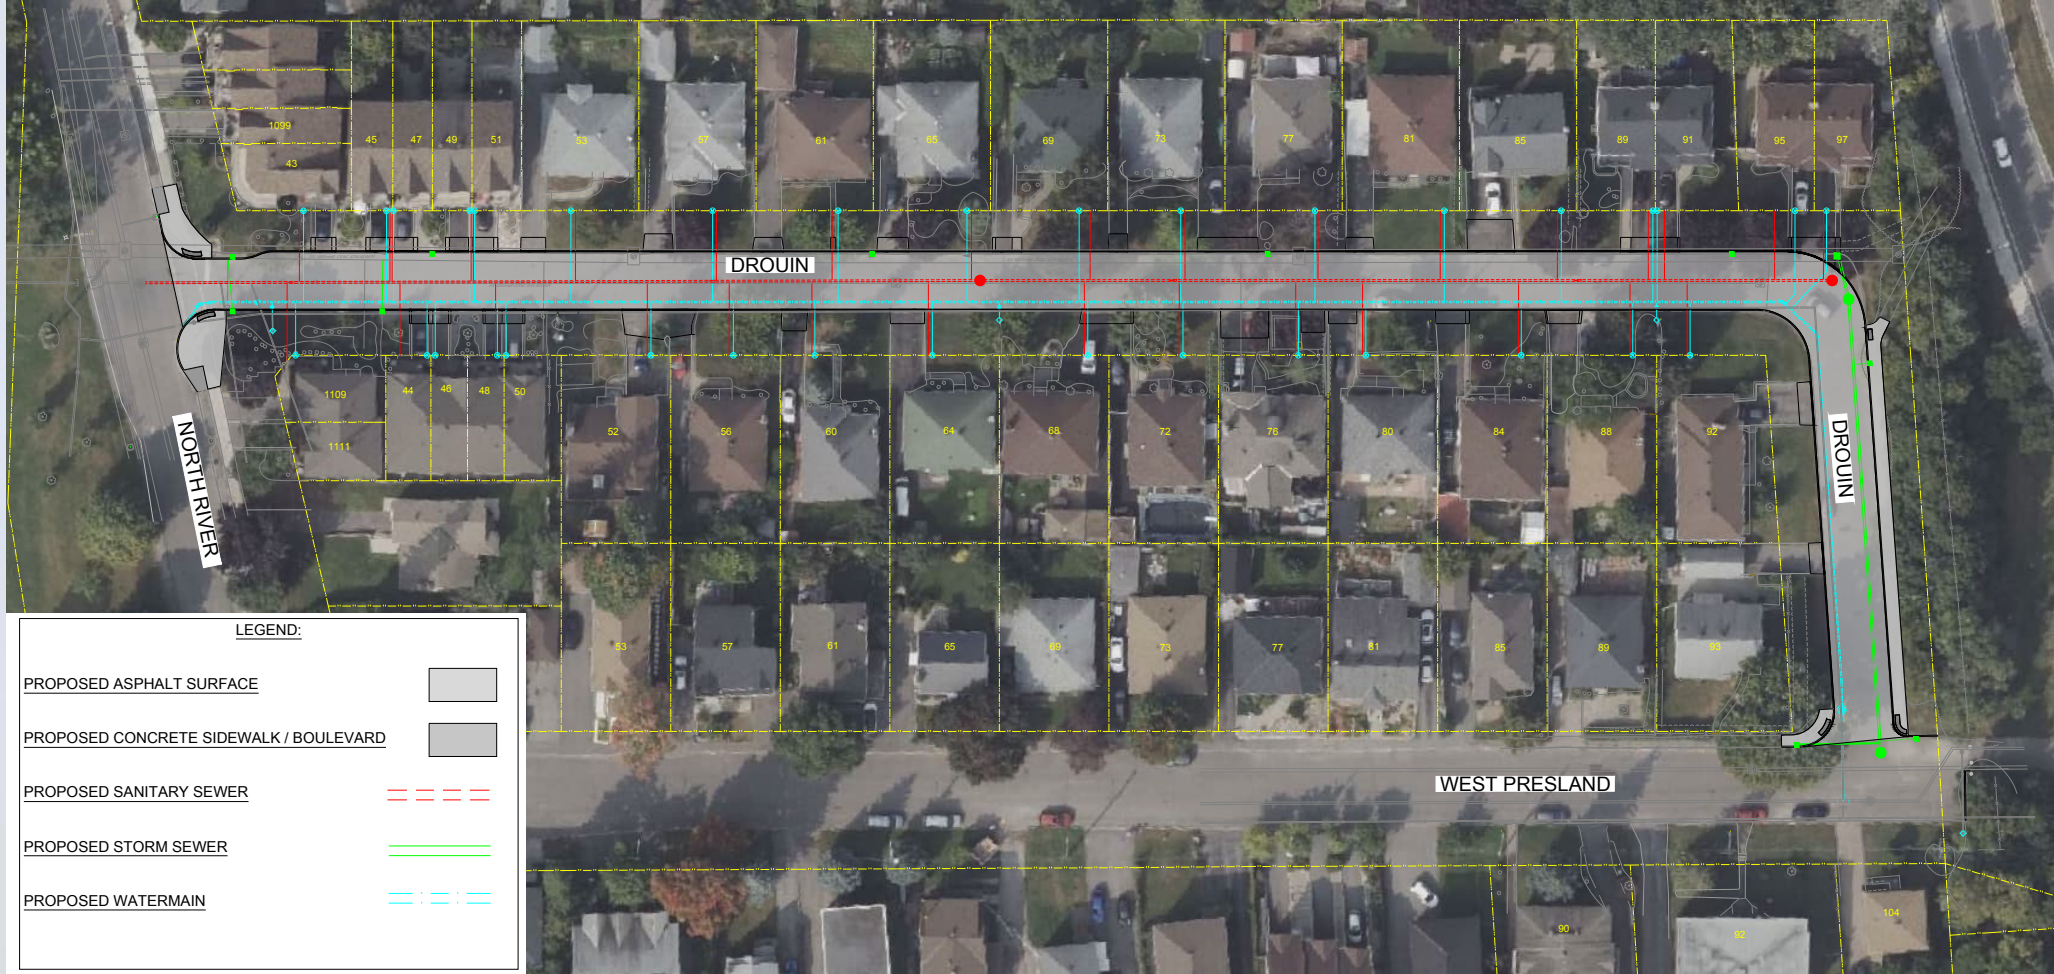

Road modification plan

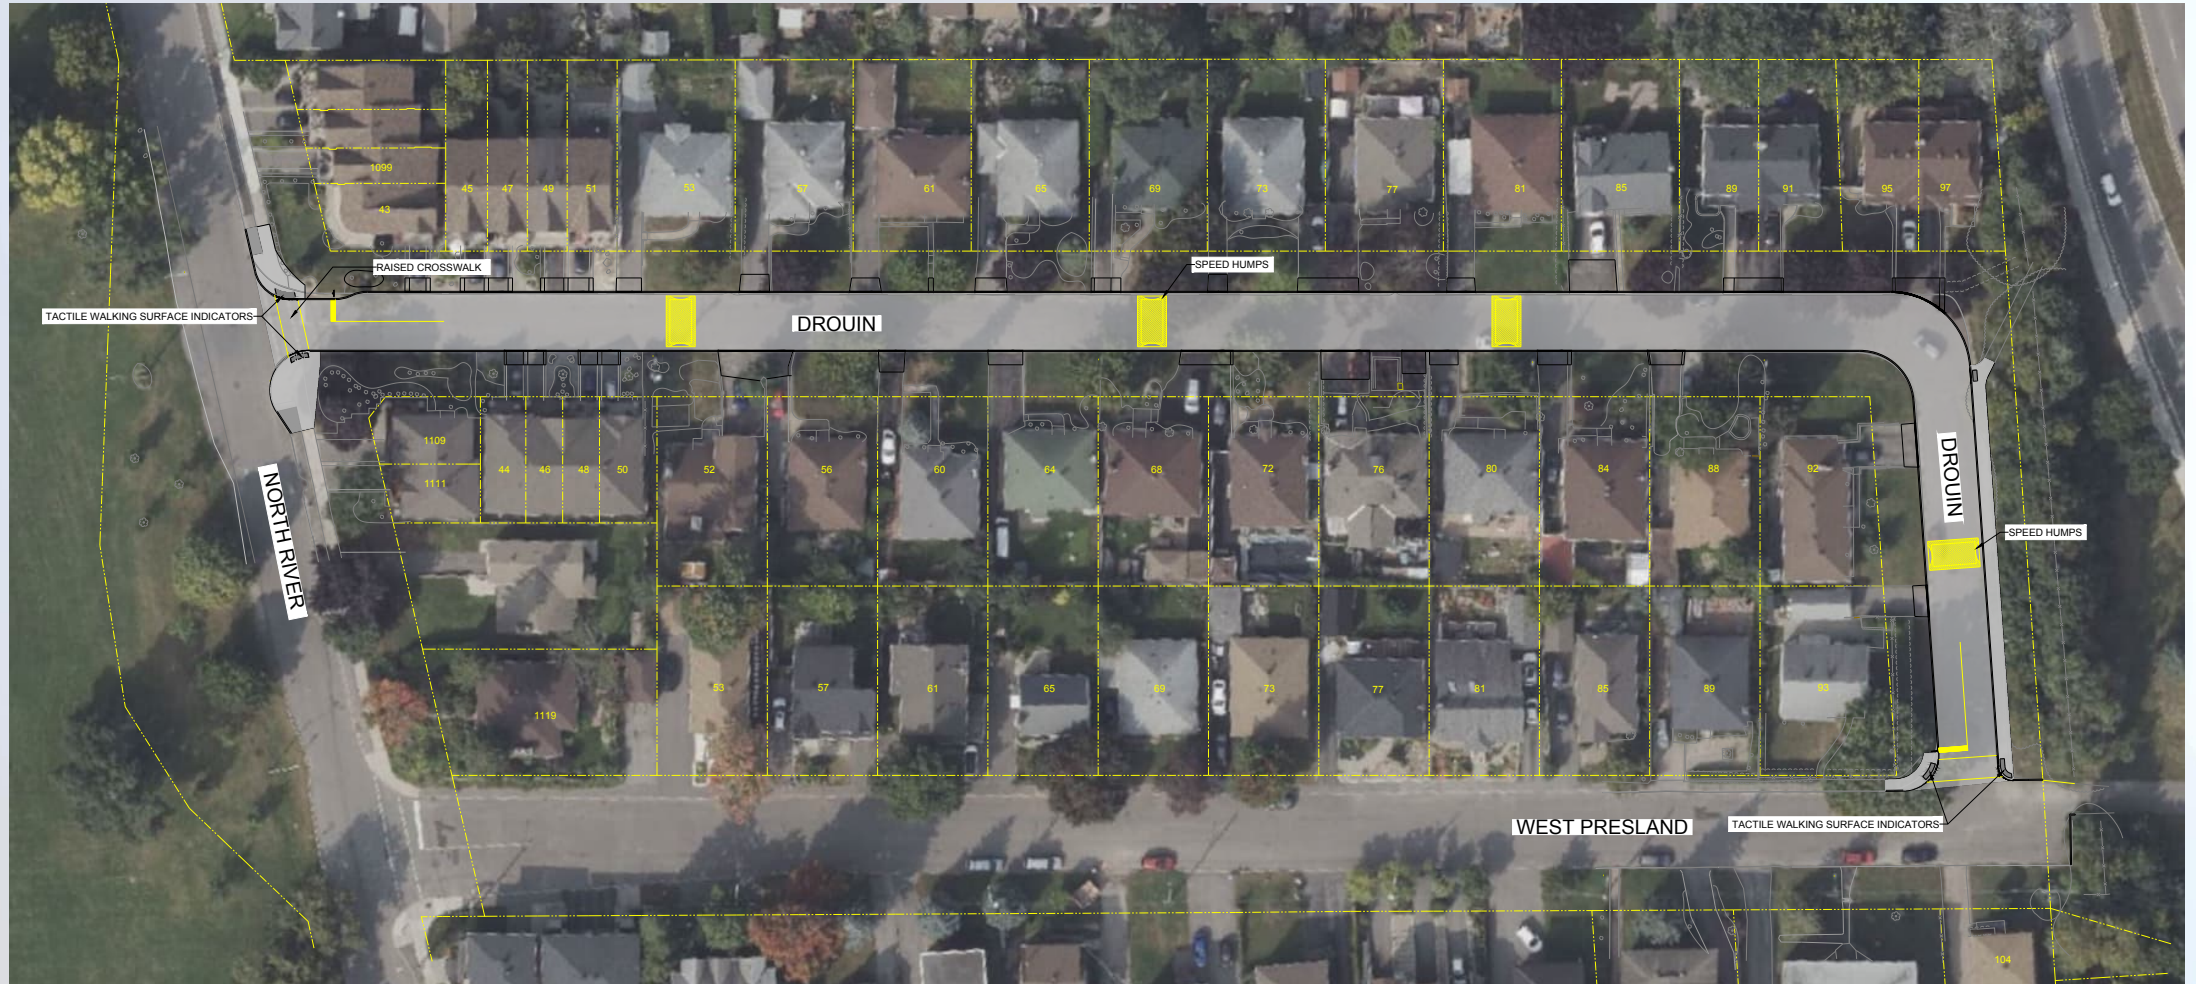

Road cross sections

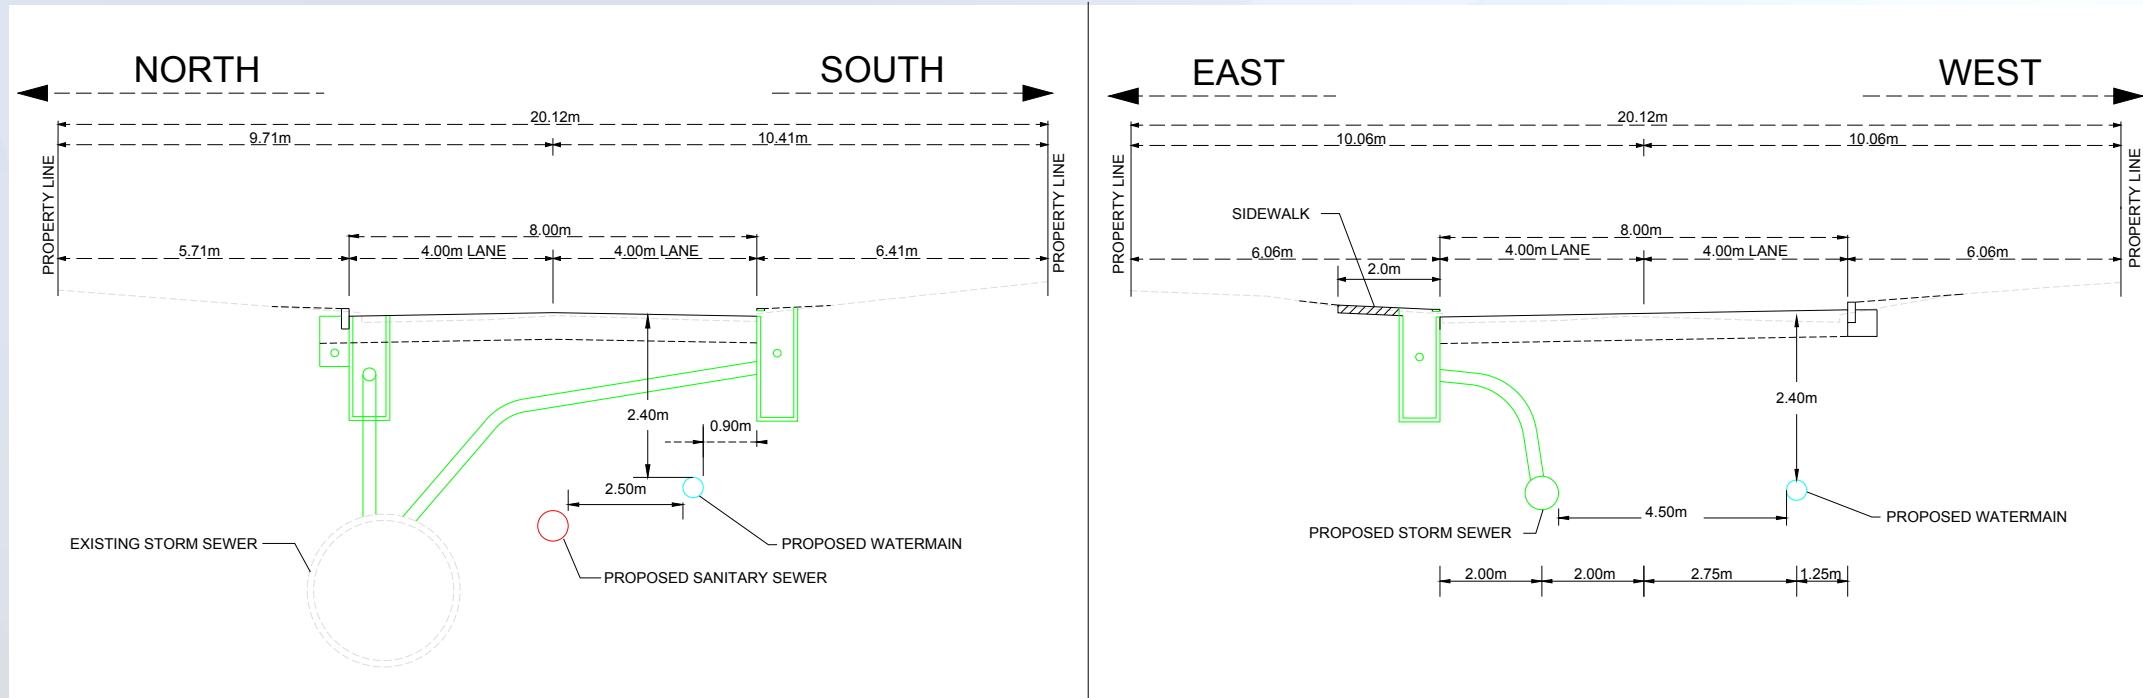

Construction process

Phase	Description
Site preparation	<ul style="list-style-type: none">▪ Installation of erosion and sediment control measures▪ Utility locates▪ Removals of existing pavement, curbs, sidewalks
Underground work	<ul style="list-style-type: none">▪ Replacement of watermain, valves, hydrants and water services▪ Replacement of storm sewers, catch basins, maintenance holes and services▪ Replacement of sanitary sewer, maintenance holes and services
Earth work	<ul style="list-style-type: none">▪ Road excavation and re-grading of road▪ Placement of new road granular materials
Concrete work	<ul style="list-style-type: none">▪ New barrier curb and sidewalk
Asphalt work	<ul style="list-style-type: none">▪ Road and driveway paving
Restoration	<ul style="list-style-type: none">▪ Topsoil and sodding▪ Interlock pavers▪ Pavement markings and reinstatement of traffic signs▪ Site clean-up

Impacts & mitigation

Impacts	Mitigation
Road closed local traffic only	Traffic control persons will be onsite to direct local traffic during the working day. Delays should be expected.
Water / Sanitary service disruption	Temporary water service will be provided during the construction period however, there will be times when water and sanitary services will be temporarily disrupted for a required construction activity. Advanced notices will be distributed to notify homeowners of these planned services interruptions however, there may be instances of breaks during construction which require emergency shutdown with no notice.
Utilities	The contractor will be responsible for locating the existing utilities during construction and working around them however, the location of the individual services are usually unknown and breaks should be expected.
Driveway access disruption due to curb, sidewalk and paving works	There will be times when driveway access will be restricted due to a required construction activity. Advanced notices will be distributed to notify homeowners of the driveway impact schedule and temporary parking locations.

Impacts & mitigation


Impacts	Mitigation
Construction dust	Dust during construction should be expected however, the contractor will mitigate dust by use of water and calcium. Use of water as dust control is limited. If using water will result in excess mud that will be tracked onto the road, calcium will be used instead.
Dirt tracking	Street sweeping will be completed as necessary for removal of dirt/mud that is tracked onto adjacent streets outside of the construction zone.
Construction noise	Construction activities will generally be restricted to 7 am to 7 pm during weekdays (except for emergency repairs or other special circumstances, if required)
Grass boulevard area disturbed	The boulevard will be restored with new sod. In addition to the watering of sod by the contractor, frequent watering by resident is strongly recommended.
Trees	Tree protection fencing will be installed around trees, if required, to protect them from removal and injury.

Construction notification

- Prior to the start of construction, the City will issue construction notices to notify the homeowners of the scheduled start date.
- For any planned temporary water or sanitary services disruption during construction, the contractor will provide a minimum 2-day advanced notice to inform the homeowners of the temporary service shutdown. There may be instances of breaks that require emergency shutdowns with no notice.
- For any temporary driveway access disruption during construction, the contractor will provide a minimum 1-day advance notice to inform the homeowners of the temporary on-street parking locations.

Construction schedule

2024

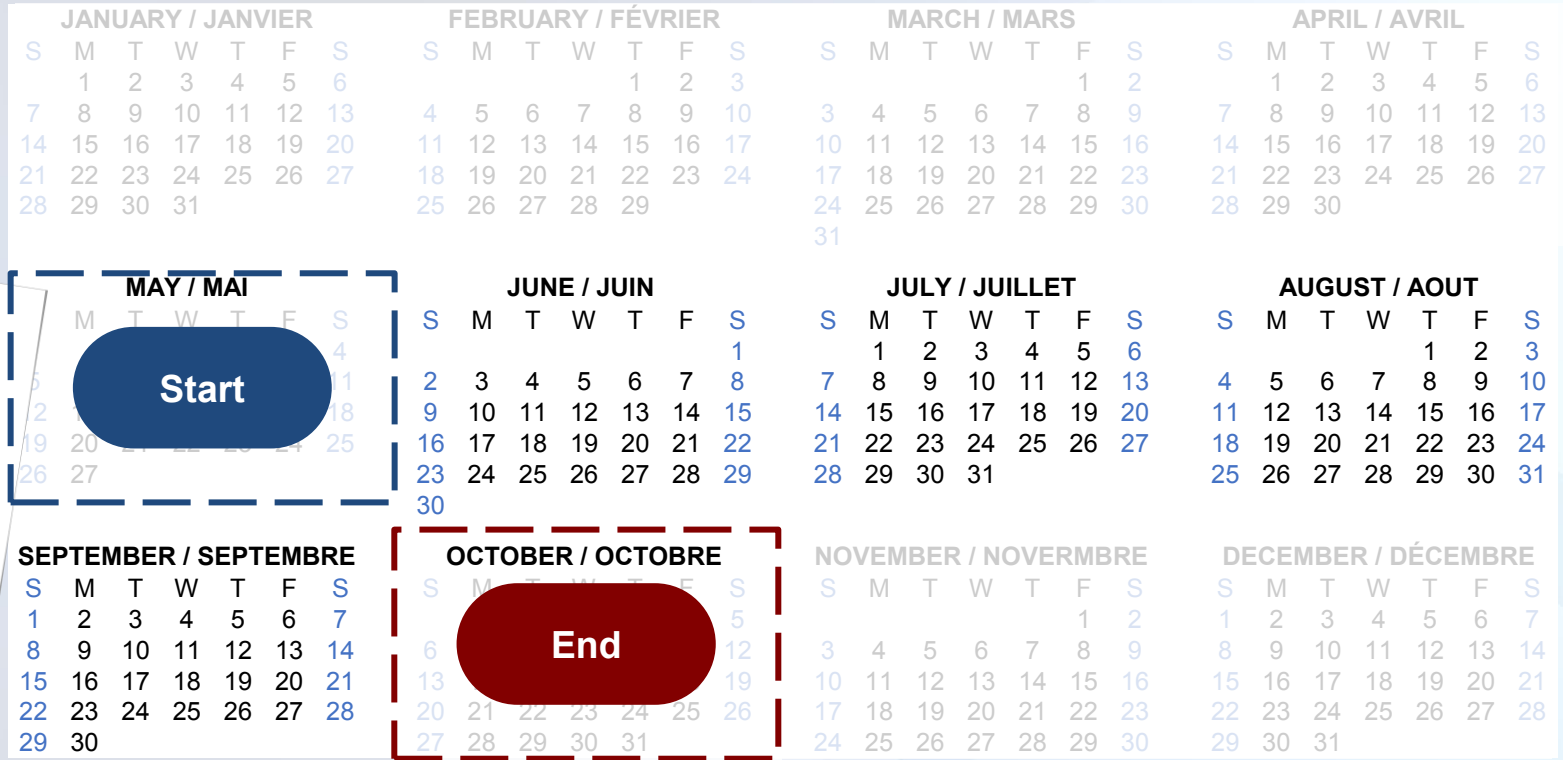

2025
Second Layer of Asphalt¹

2026
2 Year Warranty Period
Expiration
- Anticipated October -

¹ The second layer of asphalt is typically placed a year after the first layer, in case there are any defects in the first layer of asphalt, such as settlement. This allows us time to identify any defects and correct them before the second layer (top course) of asphalt is placed.

Thank you!

Thank you for your attendance. We encourage you to provide your comments via the [online form](#), by email or in writing using one of the comment sheets provided. Please deposit completed comment sheets in the box provided or mail/email your comments to the address shown on the bottom of the comment sheet **by April 4, 2024**.

All information/comments received will be maintained on file for use during the design and may be included in design documentation. With the exception of personal information, all comments will become part of the public record.

More information on the project can be found at ottawa.ca/DrouinAvenue

City Project Manager

Joe Mojsej, P.Eng.

Design and Construction—Municipal
Infrastructure Services

100 Constellation Drive, Ottawa, ON K2G 6J8

Tel.: 613-580-2424, ext. 16203

Email: joe.mojsej@ottawa.ca

Accessible formats and communication supports are available, upon request, at the following link: www.ottawa.ca/accessibleformat

